


Rod gripper NdFeB

Permanent Magnet

4028 06 ... 32

Rod gripper in steel housing

Rod gripper with an NdFeB magnet in a steel housing with a fitting tolerance, shortened to measure C
 The maximum adhesive force is achieved when the entire surface is applied to a metal substrate.
 This rod gripper has no thread and is therefore usually glued or pressed in.
 The maximum operating temperature is 80°C.

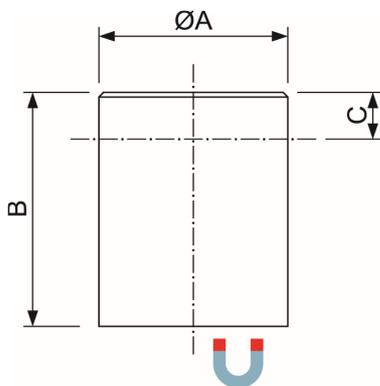

Benefits at a glance

- age-free
- Adhesive power is retained indefinitely
- Limitation of spatial effect to the magnetic field
- high bond strength and small size

Special designs or other magnetic materials are possible on request

Part number	Dimensions (mm)			Holding Power (N)	Weight (g)	Temperature (°C)
	Ø A h6	B	C			
4028 06	6	10	5	6	2	80
4028 08	8	12	7	12	5	80
4028 10	10	16	11	24	10	80
4028 13	13	18	13	60	18	80
4028 16	16	20	15	90	31	80
4028 20	20	25	18	135	61	80
4028 25	25	30	22	190	114	80
4028 32	32	35	27	340	217	80

Changes, omissions, errors in relation to the products reserved. Similar pictures. All rights belong to the respective rights holders. The adhesive forces have been determined on a ground plate (material St37) with a thickness of 10mm when the magnet is pulled off vertically (1kg approximately 10N). Deviations of up to -10% of the specified values are possible. When installing the bar gripper in iron, the adhesive force is reduced by approx. 15% due to magnetic short circuits. In order to avoid this, a distance D from the brass casing of the bar gripper to the iron must be maintained.