


Rod gripper AlNiCo

Permanent Magnet

4013 06 ... 63

Rod gripper in steel housing

Rod gripper with an AlNiCo magnet in a steel housing with a fitting tolerance, shortened to measure C
 The maximum adhesive force is achieved when the entire surface is applied to a metal substrate.
 This rod gripper has central internal thread.
 The maximum operating temperature is 450°C.

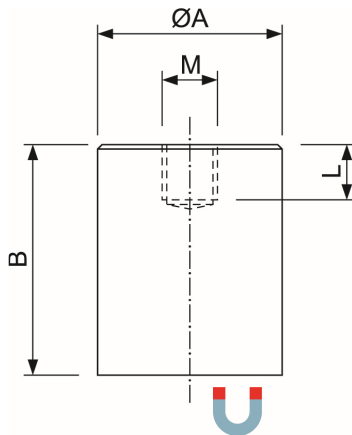

Benefits at a glance

- age-free
- Adhesive power is retained indefinitely
- Limitation of spatial effect to the magnetic field
- Highest temperatures

Special designs or other magnetic materials are possible on request

Part number	Dimensions (mm)		Thread MxL (mm)	Holding Power (N)	Weight (g)	Temperature (°C)
	Ø A h6	B				
4013 06	6	20	M3 x 5	2	4	450
4013 08	8	20	M3 x 5	4	7,5	450
4013 10	10	20	M4 x 7	8,5	11	450
4013 13	13	20	M4 x 7	12	19	450
4013 16	16	20	M4 x 5	20	30	450
4013 20	20	25	M6 x 7	40	55	450
4013 25	25	35	M6 x 9	60	121	450
4013 32	32	40	M8 x 9	160	220	450
4013 40	40	50	M8 x 9	240	440	450
4013 50	50	60	M10 x 12	400	750	450
4013 63	63	65	M10 x 12	660	1280	450

Changes, omissions, errors in relation to the products reserved. Similar pictures. All rights belong to the respective rights holders. The adhesive forces have been determined on a ground plate (material St37) with a thickness of 10mm when the magnet is pulled off vertically (1kg approximately 10N). Deviations of up to -10% of the specified values are possible. When installing the bar gripper in iron, the adhesive force is reduced by approx. 15% due to magnetic short circuits. In order to avoid this, a distance D from the brass casing of the bar gripper to the iron must be maintained.